

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REGD 25 FEB 2004

WIPO

PCT

PCT / SE 2004 / 0 0 0 0 8 6

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande                      Atlas Copco Tools AB Nacka, Stockholm SE  
Applicant (s)

(21) Patentansökningsnummer    0300153-4  
Patent application number

(86) Ingivningsdatum                      2003-01-23  
Date of filing

Stockholm, 2004-02-05

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Marita Öun

Avgift  
Fee

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

Pneumatic power tool with adjustable exhaust air outlet deflector.

The invention relates to a pneumatic power tool provided with an exhaust air outlet deflector rotatably supported on the tool housing for selectively changing the outlet flow direction from the housing.

A problem concerned with prior art power tools of the above type relates to the limited optional ways of directing the exhaust air outlet flow from the tool. In many tool applications, the operation position and orientation of the tool makes it difficult for the operator to avoid being hit by the outlet flow, which sometimes is very annoying and uncomfortable.

The main object of the invention is to provide a pneumatic power tool of the above type having a rotatively adjustable outlet flow deflector by which the exhaust air outlet flow from the tool may be directed in different radial directions as well as in the axial direction of the tool housing.

Another object of the invention is to provide a pneumatic power tool of the above mentioned type provided with an adjustable outlet flow deflector which gives a number of optional ways to direct the outlet flow from the housing and which is simple in design and easy to operate.

Further advantages and characteristic features of the invention will appear from the following specification wherein a preferred embodiment of the invention is described in detail with reference to the accompanying drawings.

In the drawings

Fig. 1 shows a longitudinal section through an outlet deflector according to the invention.

Fig. 2 shows an exploded perspective view of the outlet deflector in Fig. 1.

The power tool illustrated in Fig. 1 comprises a housing 10, a pneumatic motor (not shown), a pressure air inlet passage 11 and an exhaust air outlet passage 12 communicating with the motor, and an adjustable exhaust air outlet deflector 14. The inlet passage 11 is arranged to be connected to a pressure air conduit via tubular inlet socket 15 threaded into the rear end of the housing 10. At its outer end the inlet socket 15 is provided with an internal thread 13 for connection to a conduit nipple. A gauze screen 16 is provided in the inlet socket 15 for straining off particles from the pressure air flow. The outlet passage 12 comprises a sound attenuating expansion chamber 17 and a porous material silencer element 18 for reducing the exhaust noise from the tool.

The inlet socket 15 comprises a cylindrical surface 19 which forms a part of the outlet deflector 14. On the cylindrical surface 19 there are supported a cup-shaped outlet piece 20 and a valve element 21. Both of the outlet piece 20 and the valve element 21 are rotatively as well as axially displaceable relative to the socket 15 and the housing 10, and an annular shoulder 22 at the outer end of the socket 15 forms an axial support for the outlet piece 20. A spring 24 exerts a bias force on the valve element 21 and the outlet piece 20 to maintain the latter in contact with the shoulder 22 and to accomplish a contact pressure between the valve element 21 and the outlet piece 20. The socket 15 forms a mounting means for the entire outlet deflector 14 and is provided with a hex grip for a tightening tool.

The outlet piece 20 is provided with one radially directed outlet opening 25, and five axially directed outlet openings 26 arranged in a certain symmetric pattern. The valve element 21 comprises a flat transverse wall portion 27 with five apertures 28 arranged in a pattern congruent with pattern of the outlet openings 26 of the outlet piece 20. The valve element 21 comprises a part-cylindrical wall portion 29 leaving a radial aperture 30 (see Fig. 2) to be aligned with the radial opening 25 of the outlet piece 20 as desired.

The axial apertures 28 and the radial aperture 30 of the valve element 21 are located in such a way relative to the openings 25 and 26, respectively, of the outlet piece 20 that when the axially directed openings 26 of the outlet piece 20 coincide with the apertures 28 in the valve element 21, the radial opening 25 of the outlet piece 20 is covered and closed by the wall portion 29 of the valve element 21, i.e. the aperture 30 does not at all coincide with the opening 25. This means that you can have either an axially directed outlet flow or a radially directed outlet flow.

As can be seen in Fig. 1, each one of the openings 26 is surrounded on its inside by an annular shoulder 32 forming a friction surface to be contacted by the wall portion 27 of the valve element 21. By the frictional engagement between the valve element 21 and the outlet piece 20 there may be accomplished a joint rotation of the outlet piece 20 and the valve element 21 when rotating the outlet piece 20.

At its rear end, the housing 10 comprises a transverse wall element 33 having a number of exhaust flow openings 34. The wall element 33 is also provided with a circumferential row of coupling teeth 35 which are intended to be engaged by a rearwardly directed tooth 36 on the valve element 21. This engagement takes place when the valve element 21 is

manually displaced rearwardly via the outlet piece 20, against the bias force of the spring 24. When positively coupled to the housing 10 via the teeth 35,36 the valve element 21 is locked against rotation whereas the outlet piece 20 still can be rotated by a torque exceeding the continuously acting frictional resistance between the outlet piece 20 and the valve element 21. A forwardly directed tooth 38 on the valve element 21 is arranged to co-operate with two abutments (not illustrated) on the outlet piece 20 so as to limit the relative rotation between the outlet piece 20 and the valve element 21 and to define the two relative end positions between the outlet piece 20 and the valve element 21 as described below.

By rotating the outlet piece 20 relative to the valve element 21 between the two end positions there is obtained a shifting between a radially directed outlet flow and an axially directed outlet flow, i.e. a shifting between

- a first relative position of the outlet piece 20 and the valve element 21 wherein the apertures 28 in the valve element 21 fully coincide with the axially directed openings 26 of the outlet piece 20 in the valve element 21, whereas at the same time the radial aperture 30 of the valve element 21 is totally out of alignment with the radial opening 25 of the outlet piece 20, and
- a second relative position in which the radial aperture 30 of the valve element 21 fully coincides with the radial opening 25 in the outlet piece 20, whereas at the same time the axially directed apertures 28 in the valve element 21 not at all coincide with the axially directed openings 26 in the outlet piece 20.

When, however, the outlet piece 20 and the valve element 21 occupy their second relative positions and the outlet piece 20 is not axially displaced towards the housing, the outlet piece 20 and the valve element 21 may be rotated jointly by

frictional interengagement, thereby changing the direction of the radial outlet flow through the opening 25 and aperture 30 in any desired direction.

When desired to change the direction of the outlet flow from a radial direction to the axial direction, the outlet piece 20 is pressed towards the housing 10 and rotated. Thereby, the teeth 36 of the valve element 21 and the teeth 35 of the wall element 33 are engaged to lock the valve element 21, and the outlet piece 20 may be rotated alone to the above mentioned first relative position defined by the teeth 38 on the valve element 21 and the non-illustrated abutments in the outlet piece 20. In this position, the radial opening 25 is brought out of alignment with the aperture 30 of the valve element 21, whereas the axially directed openings 26 of the outlet piece 20 fully coincide with the apertures 28 of the valve element 21.

When desired to change back to a radial outlet flow direction, the outlet piece 20 is again pressed axially towards the housing 10 making the tooth 36 of the valve element 21 engage the teeth 35 on the wall element 33, whereby the valve element 21 is locked against rotation and the outlet piece 20 may be rotated to the second relative position defined by the tooth 38 and the non-illustrated abutments of the outlet piece 20. Then a full coincidence is obtained between the opening 25 on the outlet piece 20 and the aperture 30 on the valve element 21, whereas the axially directed openings 26 are out of alignment with the apertures 28 of the valve element 21.

It is to be understood that the embodiments of the invention are not limited to the above described example but can be freely varied within the scope of the claims.

Claims.

1. Pneumatic power tool, comprising a housing (10), a motor, a pressure air inlet passage (11,15) and an exhaust air outlet passage (12,17), and an adjustable exhaust air outlet deflector (14) rotatably supported on said housing (10),

characterized in that said outlet deflector (14) comprises

a cup-shaped outlet piece (20) having at least one radially directed outlet opening (25), and one or more axially directed outlet openings (26) arranged in a certain pattern,

a valve element (21) rotatably supported in a co-axial relationship with said outlet piece (20),

said valve element (21) has one or more axially directed apertures (28) arranged in a pattern congruent with said certain pattern of said axially directed outlet opening or openings (26) of said outlet piece (20), and at least one radially directed aperture (30) to be selectively brought into alignment with said at least one radially directed outlet opening (25) of said outlet piece (20), wherein said outlet piece (20) and said valve element (21) are rotatable relative to each other between

- a first relative position wherein said axially directed aperture or apertures (28) of said valve element (21) coincide fully with said axially directed outlet opening or openings (26) of said outlet piece (20), and said at least one radially directed aperture (30) of said valve element (21) does not at all coincide with said radially directed outlet opening or openings (25) of said outlet piece (20), and

- a second relative position wherein said at least one radially directed aperture (30) of said valve element (21) coincides fully with said radially directed outlet opening or openings (25) of said outlet piece (20), and said

axially directed aperture or apertures (28) of said valve element (21) do not at all coincide with said axially directed outlet opening or openings (26) of said outlet piece (20).

2. Power tool according to claim 1, wherein said outlet piece (20) and said valve element (21) are axially displaceable relative to the housing (10), and a spring (24) is arranged to bias said valve element (21) against said outlet piece (20) so as to frictionally couple said valve element (21) relative to said outlet piece (20) for accomplishing joint rotation of said outlet piece (20) and said valve element (21) for adjusting the exhaust flow outlet direction from the outlet deflector (14) in said second relative position, and a coupling device (35,36) is provided between said valve element (21) and the housing (10) for positively locking said valve element (21) against rotation as said valve element (21) is displaced axially toward the housing (10) by said outlet piece (20) against the bias force of said spring (24), thereby enabling said outlet piece (20) to be rotated relative to said valve element (21) between said first relative position and said second relative position, despite the frictional coupling between said outlet piece (20) and said valve element (21).

3. Power tool according to claim 1 or 2, wherein said air inlet passage (11,15) comprises an inlet socket (15) secured to the housing (10) and extending co-axially through said outlet piece (20) and said valve element (21), and an annular shoulder (22) on said inlet socket (15) forms an axial bearing surface for said outlet piece (20).

4. Power tool according to claim 3, wherein said valve element (21) is located inside said outlet piece (20).



Abstract.

A pneumatic power tool comprises a housing (10), a motor, a pressure air inlet passage (11,15), an exhaust air outlet passage (12,17), and an exhaust air outlet flow deflector (14) including an outlet piece (20) with radial as well as axial outlet openings (25,26) and a valve element (21) with radial as well as axial apertures (30,28), wherein the outlet piece (20) and the valve element (21) are rotatable relative to the housing (10) as well as to each other to bring alternatively a radial opening (25) of the outlet piece (20) into or out of alignment with a radial aperture (30) of the valve element (21), and at the same time bring the axial apertures (28) of the valve element (21) out of or into alignment with the openings (26) of the outlet piece (20), thereby shifting the exhaust outlet flow direction as desired between a radial direction and an axial direction.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10

FIG 1

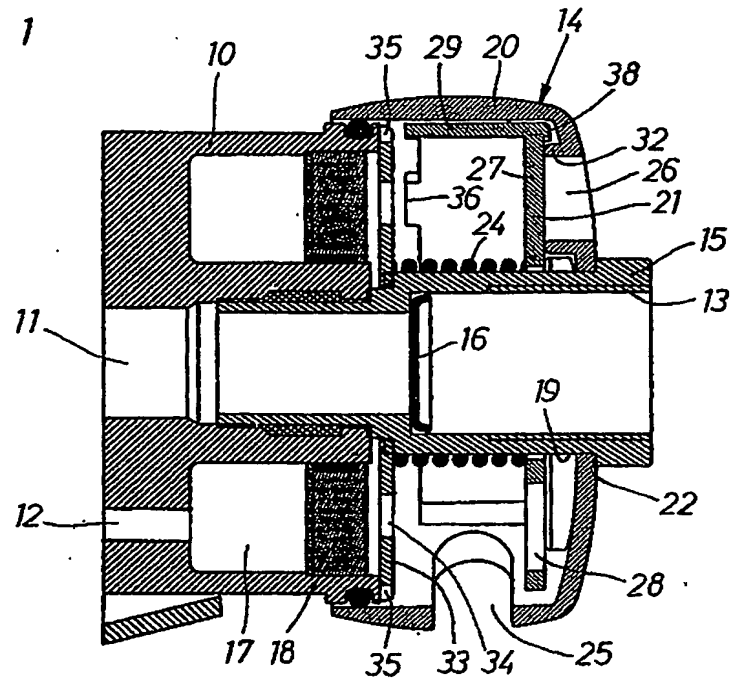


FIG 2

